

JDS-8000HDI-S

**JDS-8000HDI-S Series Net DVR
Technical Manual**

JDS-8000HDI-S

Notices

The information in this documentation is subject to change without notice and does not represent any commitment on behalf of JOIN AUSTRALIA. JOIN disclaims any liability whatsoever for incorrect data that may appear in this documentation. The product(s) described in this documentation are furnished subject to a license and may only be used in accordance with the terms and conditions of such license.

This documentation is issued in strict confidence and is to be used only for the purposes for which it is supplied. It may not be reproduced in whole or in part, in any form, or by any means or be used for any other purpose without prior written consent of JOIN and then only on the condition that this notice is included in any such reproduction. No information as to the contents or subject matter of this documentation, or any part thereof, or arising directly or indirectly therefrom, shall be given orally or in writing or shall be communicated in any manner whatsoever to any third party being an individual, firm, or company or any employee thereof without the prior written consent of JOIN. Use of this product is subject to acceptance of the JOIN agreement required to use this product. JOIN reserves the right to make changes to its products as circumstances may warrant, without notice.

This documentation is provided "as-is," without warranty of any kind.

Please send any comments regarding the documentation to:

Find out more about JOIN at www.JOINCC.com.AU

JDS-8000HDI-S

Contents

- 1. Overview**
- 2. Model Description**
- 3. Features**
- 4. Specifications**

JDS-8000HDI-S


1. Overview

JDS-8000HDI-S series Network Digital video Recorder is an excellent digital surveillance product adopts embedded MCU (Microprocessor Control Unit) and an embedded Real-Time Operating System (RTOS), along with the most advanced technology in the Information technology Industry such as video and audio encoding/decoding, hard disk recording and TCP/IP transmission. The firmware is burned into the flash, making it more stable and reliable than software programs running from a standard disk drive.

JDS-8000HDI-S series combines the advantages of Digital Video Recorder (DVR) and Digital Video Server (DVS). It is widely applied as a stand-alone unit or a part of a powerful surveillance system.



JDS-8000HDI-S Front Panel

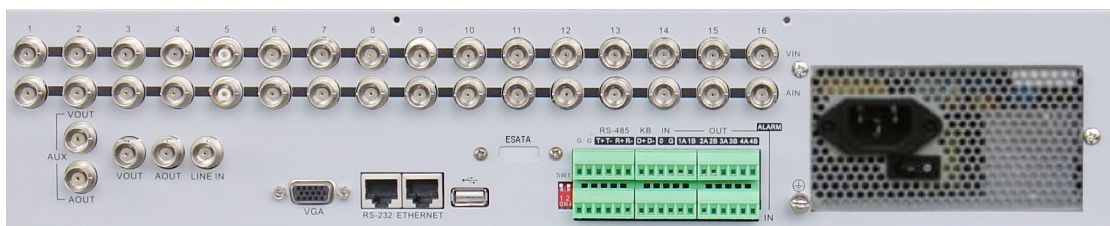

JDS-8016HDI-S Rear Panel

JDS-8000HDI-S

2. Model Description

JDS-8004HDI-S: 4-ch video and audio input; each channel can max support 4CIF encoding resolution; it has 4 SATA interfaces

JDS-8008HDI-S: 8-ch video and audio input; support up to 4CIF encoding resolution; it has 8 SATA interfaces

JDS-8016HDI-S: 16-ch video and audio input; support up to 4CIF encoding resolution; it has 8 SATA interfaces

Note: The default DVRs are without HDD or CD-R/W.

JDS-8000HDI-S

3. Features

3.1 Compression:

- Support up to 16 video channels (NTSC/PAL). Each channel is independent with H.264 hardware compression in real time (NTSC 30FPS, PAL 25FPS).
- Support both variable bit rate and frame rate
- Support up to 16 channels audio input channels. Each channel is independent with OggVorbis at a bit rate of 16Kbps
- Compressed video and audio are synchronous. Either composited stream (video and audio) or video-only can be selected.
- Support 4CIF, DCIF, 2CIF, CIF and QCIF resolution.
- Support multi-area motion detection
- Support OSD and changeable OSD position

3.2 Local functions:

3.2.1 Recording:

- Support multiple recording types, including schedule recording, manual recording, motion detection, external alarm, motion & alarm and motion | alarm, etc.
- Support up to 8 HDDs. Each HDD can support 2000GB maximum.
- Support FAT32 file system
- Support NAS Recording.
- Support Event Recording Para. Setup.
- Support HDD S.M.A.R.T technology
- Support continuous (overwrite) and linear (stop when full) record modes
- Support backup recorded files and video/audio clips with USB memory stick (thumb drive), USB HDD, USB CD-R/W, USB DVD-R/W or SATA HDD.

3.2.2 Preview and playback:

- Support BNC analog monitor and VGA output for main output
- Support one spot video and spot audio output
- Support multiple live view modes
- Support Privacy Mask
- Support camera block alert.
- Support video signal loss alert.
- Support 2-ch synchronous playback.

JDS-8000HDI-S

- Support play forward, backward, pause, frame-by-frame, etc
- Support play back by files or by time/date
- Displays local record status

3.2.3 PTZ:

- Support multiple PTZ protocols
- Support preset, sequence and cruise

3.2.4 Alarms:

- Support exception alarm, motion detection alarm, external alarm, etc

3.3 Miscellaneous:

- Support IR Remote control
- Support RS-485 keyboard
- Support multi-level user management
- Support Mouse Operation Menu.
- Support multiple upgrade modes, including FTP, USB and CD.

3.4 Network:

- Support Advanced Network Function: NTP, DDNS and E-mail.
- Support TCP, UDP, RTP, Multicast for network viewing
- Support PPPoE for broad band dialup
- Support PSTN for standard dialup
- Support remote parameters setup
- Alarm information can be sent to remote center
- Network control PTZ
- Network video/audio recording
- Network download and playback recorded files from the DVR
- Remote upgrading DVR firmware
- RS-232 supports transparent channel function
- Support bi-directional audio or one-way audio broadcast
- Support IE preview and configuration
- Support SADP protocol
- Support remote log query

3.5 Development support:

- Provide network SDK (Software Development Kit)

JDS-8000HDI-S

-
- Provide client demo source code

JDS-8000HDI-S

4. Specifications

Model	JDS-8004HDI-S	JDS-8008HDI-S	JDS-8016HDI-S
Video compression	H.264		
Preview resolution	4CIF (PAL: 704*576, NTSC: 704*480)		
Playback resolution	4CIF/DCIF/2CIF/CIF/QCIF		
Synchronous playback	2-ch		
Video input	4	8	16
	BNC (1.0Vp-p, 75Ω)		
Main video output	1 channel, BNC (1.0Vp-p, 75Ω)		
Aux video output	1 channel, BNC (1.0Vp-p, 75Ω)		
Frame rate (per channel)	4CIF: 12fps DCIF: 15fps 2CIF: 25(P)/30(N) fps		
Stream type	Video/Video&Audio		
Support dual stream	Yes		
Bit rate	32Kbps~2Mbps (Max. 8Mbps), user-defined		
Audio input	4	8	16
	BNC (2.0Vp-p, 1kΩ)		
Main audio output	1 channel, BNC (Linear Electrical Level, 600Ω)		
Aux audio output	1 channel, BNC (Linear Electrical Level, 600Ω)		
Audio compression	OggVorbis, 16Kbps		
Voice talk	1 channel, BNC (2.0Vp-p, 1KΩ)		
Communication interface	1 RJ45 10M/100M Adaptive Ethernet Interface 1 RJ45 RS232 Port		
RS-485 Port	1 Port (T+, T-, R+, R-)		
Keyboard interface	1 Port (D+, D-)		
SATA interface	4	8	8

JDS-8000HDI-S

USB interface	1 USB interface, can support USB disk, USB HDD, USB DVD-R/W and CD-R/W		
VGA interface	1 VGA interface, support resolution: 800*600/60Hz, 1024*768/60Hz, 1280×1024/60Hz		
External alarm in	4	16	16
Relay output	2	4	4
Power supply	100~240VAC, 6.3A, 50~60Hz		
Power consumption	≤70W (without HDD and DVD-R/W)		
Working temperature	-10°C ~ +55°C		
Working humidity	10% ~ 90%		
Size	470mm(D)*441mm(W)*90mm(H)		
Weight	≤8Kg (without HDD and DVD-R/W)		

PAL: 176×144(QCIF), 352×288(CIF), 704×288(2CIF), 528×384(DCIF), 704×576(4CIF);
 NTSC: 176×120(QCIF), 352×240(CIF), 704×240(2CIF), 528×320(DCIF), 704×480(4CIF).

[Join Computer & Control Australia Pty, Ltd.](http://www.joincc.com.au)
[Unit B13, 2A Westall Road , Clayton Vic 3168 Australia](http://www.joincc.com.au)
[Tel: +61 3 95400708](tel:+61395400708)
[Fax: +61 3 95400707](tel:+61395400707)
[Email:DVRSALES@joincc.com.au](mailto:DVRSALES@joincc.com.au)
www.joincc.com.au